
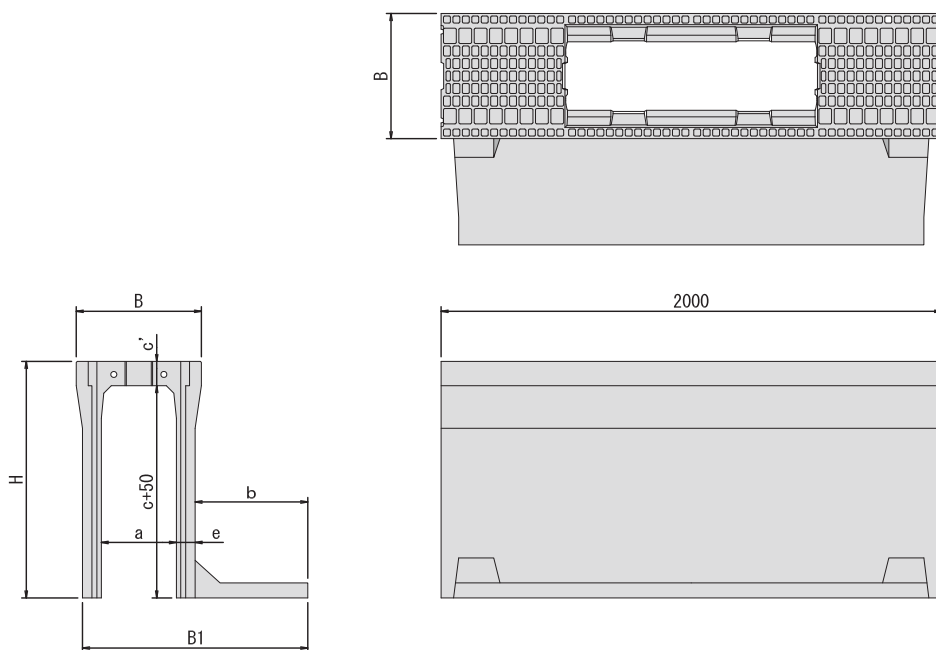


寸法及び規格 (土留用 水路幅300 ~ 400)

縦断走行

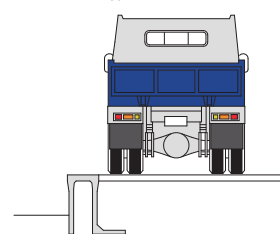


呼び名 内幅(a) × 内高(c)	寸法 (mm)							参考質量 (kg)
	B	H	b	c'	d	e	B1	
300 × 300		445	250				660	417
		545	300				710	479
		645	350				760	542
		745	350				780	659
		845	400				830	731
		945	450				900	890
		1,045	450				900	960
		1,145	500				970	1,162
		1,245	550				1,020	1,257
		1,345	550				1,050	1,545
400 × 400		560	250				770	546
		660	300				820	613
		760	350				870	680
		860	400				940	823
		960	450				990	900
		1,060	450				1,010	1,060
		1,160	500				1,060	1,148
		1,260	550				1,130	1,366
		1,360	550				1,130	1,450
		1,460	600				1,210	1,775
※※※※※		1,560	650				1,260	1,892
		1,660	650				1,260	1,991
		1,760	700				1,310	2,108
		560	250				770	546
		660	300				820	613
		760	350				870	680
※※※※※		860	400				940	823
		960	450				990	900
		1,060	450				1,010	1,060
		1,160	500				1,060	1,148
		1,260	550				1,130	1,366
		1,360	550				1,130	1,450
		1,460	600				1,210	1,775
		1,560	650				1,260	1,892
		1,660	650				1,260	1,991
		1,760	700				1,310	2,108

cは呼び高さであり、製品実長はc-2mmとする。

※の規格については営業担当者までお問い合わせください。

寸法及び規格 (土留用 水路幅500 ~ 600)

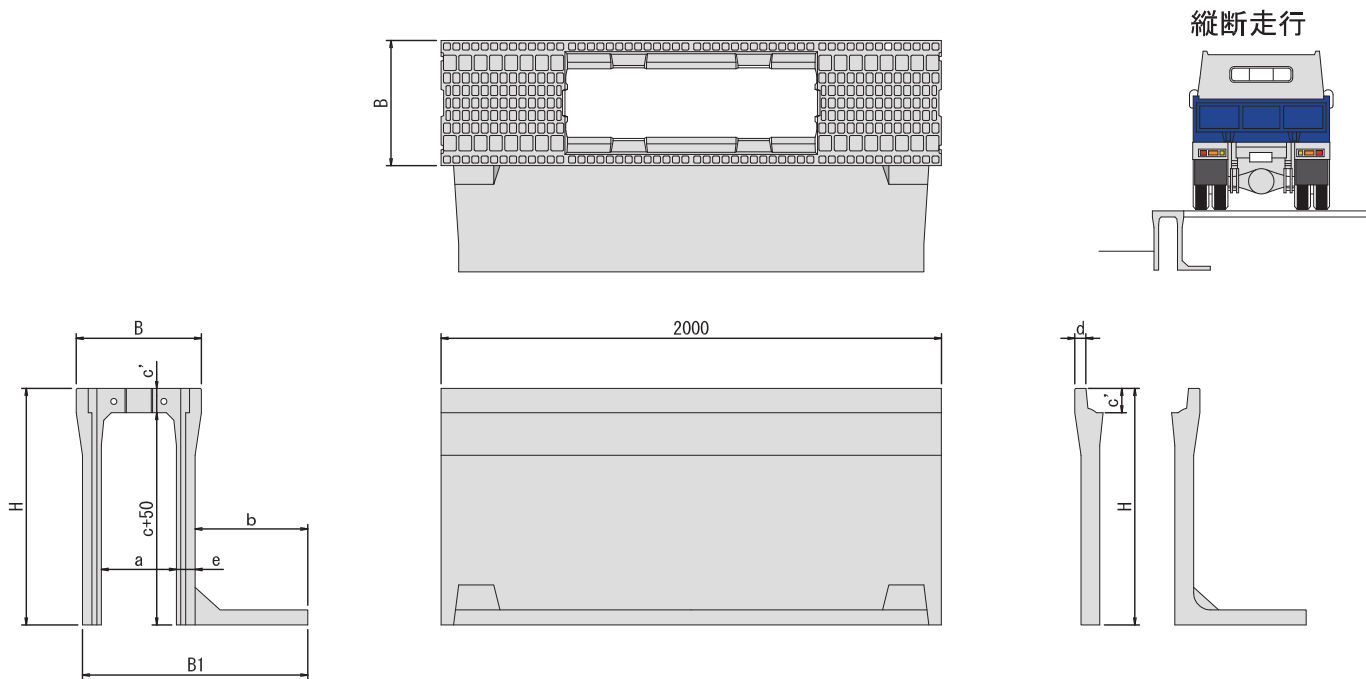

呼び名 内幅(a) × 内高(c)	寸法 (mm)							参考質量 (kg)	
	B	H	b	c'	d	e	B1		
500 × 400	720	575	250	127	55	60	870	614	
		675	300				920	681	
		775	350				990	813	
		875	400				1,040	890	
		975	450				1,090	968	
		1,075	450				1,120	1,194	
		1,175	500				85	1,170	1,288
		1,275	550				1,220	1,383	
		1,375	550				1,240	1,618	
		1,475	600				95	1,290	1,726
600 × 400	830	590	250	142	60	65	980	709	
		690	300				1,030	781	
		790	350				1,080	853	
		890	350				1,100	998	
		990	400				75	1,150	1,081
		1,090	450				1,200	1,165	
		1,190	500				90	1,280	1,411
		1,290	500				1,280	1,496	
		1,390	550				1,330	1,595	
		1,490	600				1,400	1,862	
600 × 600	830	590	250	142	60	75	1,150	1,081	
		690	300				1,200	1,165	
		790	350				90	1,280	1,411
		890	350				1,280	1,496	
		990	400				1,330	1,595	
		1,090	450				1,400	1,862	
		1,190	500				100	1,450	1,974
		1,290	500				1,450	2,068	
		1,390	550				1,530	2,456	
		1,490	600				1,580	2,585	
600 × 800	830	590	250	142	60	115	1,580	2,755	
		690	300				1,630	2,888	
		790	350				1,680	3,021	
		890	350				1,730	3,154	
		990	400				1,780	3,287	
		1,090	450				1,830	3,420	
		1,190	500				1,880	3,553	
		1,290	500				1,930	3,686	
		1,390	550				1,980	3,819	
		1,490	600				2,030	3,952	

cは呼び高さであり、製品実長はc-2mmとする。
 ※の規格については営業担当者までお問い合わせください。