
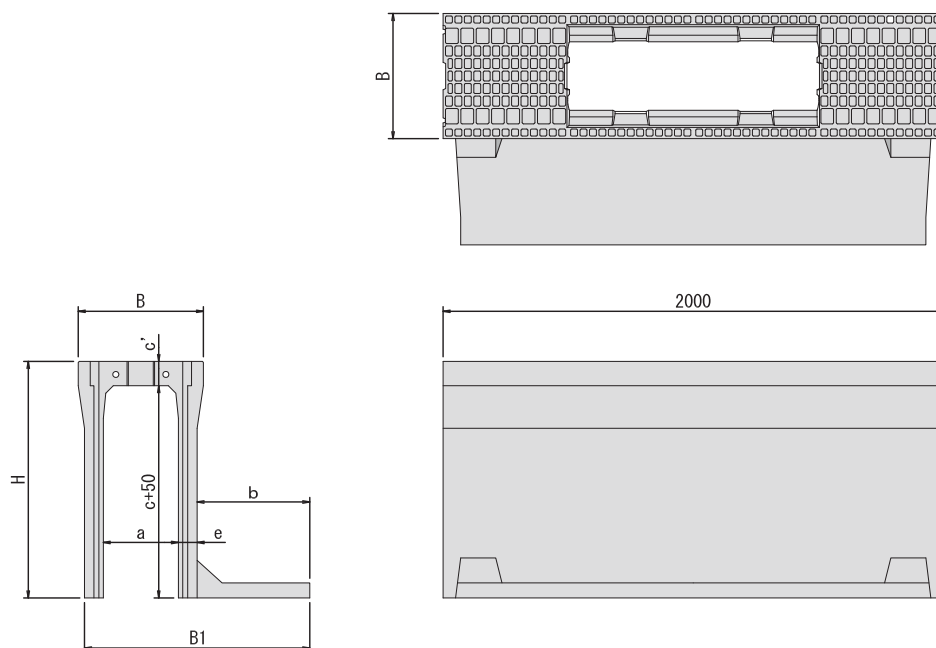


寸法 及び 規格 (土留用 水路幅300 ~ 400)

縦断走行





呼び名		寸 法 (mm)						参考質量 (kg)
内幅(a)	× 内高(c)	B	H	b	c'	d	e	
※※※※※	300 × 300		445	250				417
	× 400		545	300			55	479
	× 500		645	350				542
	× 600		745	350				659
	× 700		845	400			65	731
	× 800		945	450				890
	× 900	500	1,045	450			75	960
	× 1,000		1,145	500	97	45		1,162
	× 1,100		1,245	550			85	1,257
	× 1,200		1,345	550				1,545
	× 1,300		1,445	600				1,657
	× 1,400		1,545	650			100	1,770
※※※※※	× 1,500		1,645	700				1,863
	400 × 400		560	250				546
	× 500		660	300			60	613
	× 600		760	350				680
	× 700		860	400				823
	× 800		960	450			70	900
	× 900		1,060	450				1,060
	× 1,000	610	1,160	500	112	50	80	1,148
	× 1,100		1,260	550				1,366
	× 1,200		1,360	550			90	1,450
	× 1,300		1,460	600				1,775
	× 1,400		1,560	650				1,892
	× 1,500		1,660	650			105	1,991
	× 1,600		1,760	700				2,108

cは呼び高さであり、製品実長はc-2mmとする。

※の規格については営業担当者までお問い合わせください。

寸法 及び 規格 (土留用 水路幅500 ～ 600)

縦断走行

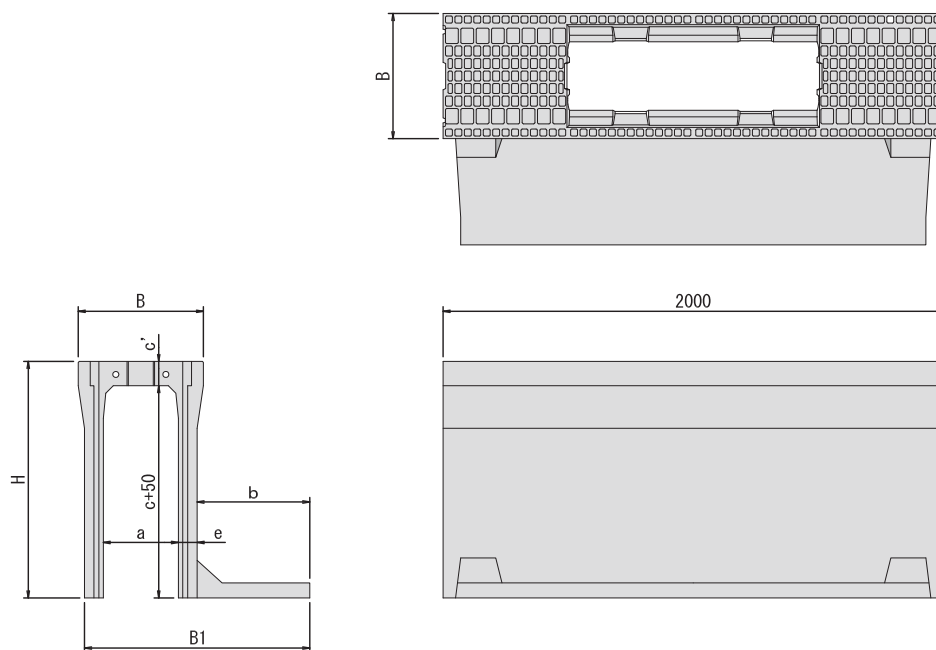

	呼び名		寸 法 (mm)					参考質量 (kg)
	内幅(a)	× 内高(c)	B	H	b	c'	d	
※※※								

cは呼び高さであり、製品実長はc-2mmとする。

※の規格については営業担当者までお問い合わせください。