


寸法 及び 規格 (縦断用 水路幅300 ~ 400)

縦断走行

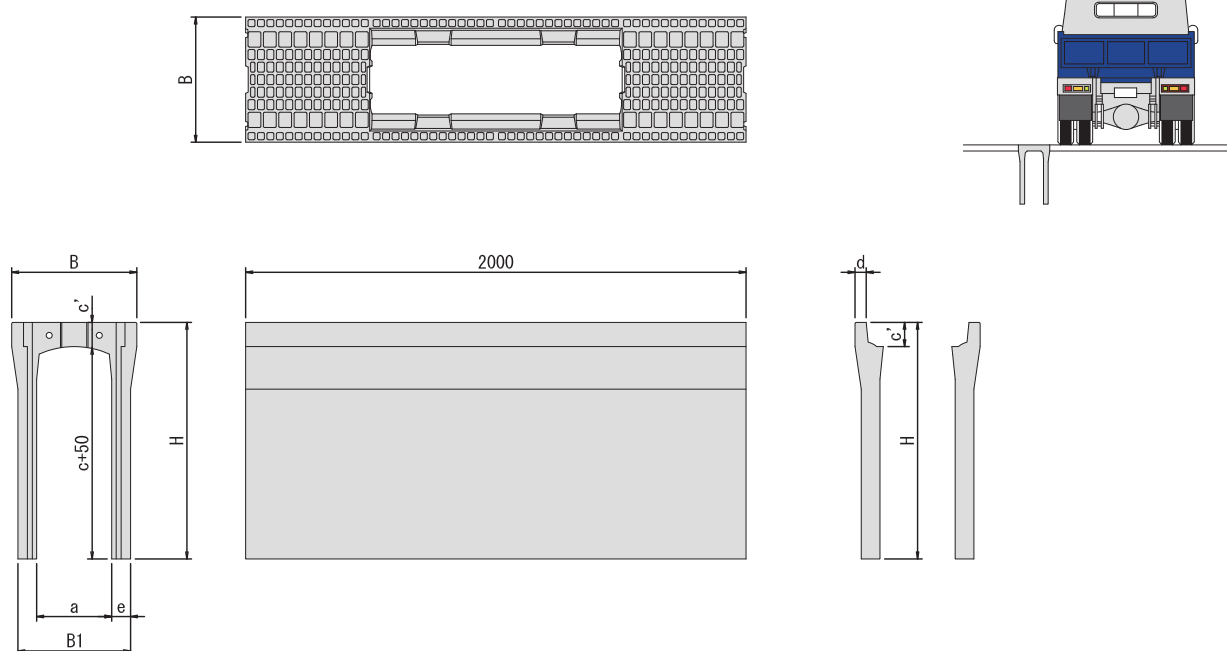


呼び名		寸 法 (mm)						参考質量 (kg)
内幅(a)	内高(c)	B	H	c'	d	e	B1	
300	×	300	445			50	400	330
	×	400	545					406
	×	500	645			55	410	458
	×	600	745					565
	×	700	845			65	430	626
	×	800	945					760
	×	900	1,045			75	450	830
	×	1,000	1,145					992
	×	1,100	1,245			85	470	1,072
	×	1,200	1,345					1,315
※	×	1,300	1,445					1,408
	×	1,400	1,545			100	500	1,502
	×	1,500	1,645					1,596
400	×	400	560			55	510	464
	×	500	660			60	520	540
	×	600	760					596
	×	700	860			70	540	717
	×	800	960					783
	×	900	1,060					931
	×	1,000	1,160			80	560	1,006
	×	1,100	1,260					1,181
	×	1,200	1,360			90	580	1,265
	×	1,300	1,460					1,527
※	×	1,400	1,560					1,625
	×	1,500	1,660			105	610	1,724
	×	1,600	1,760					1,822

cは呼び高さであり、製品実長はc-2mmとする。

※の規格については営業担当者までお問い合わせください。

寸法 及び 規格 (縦断用 水路幅500 ～ 600)

縦断走行

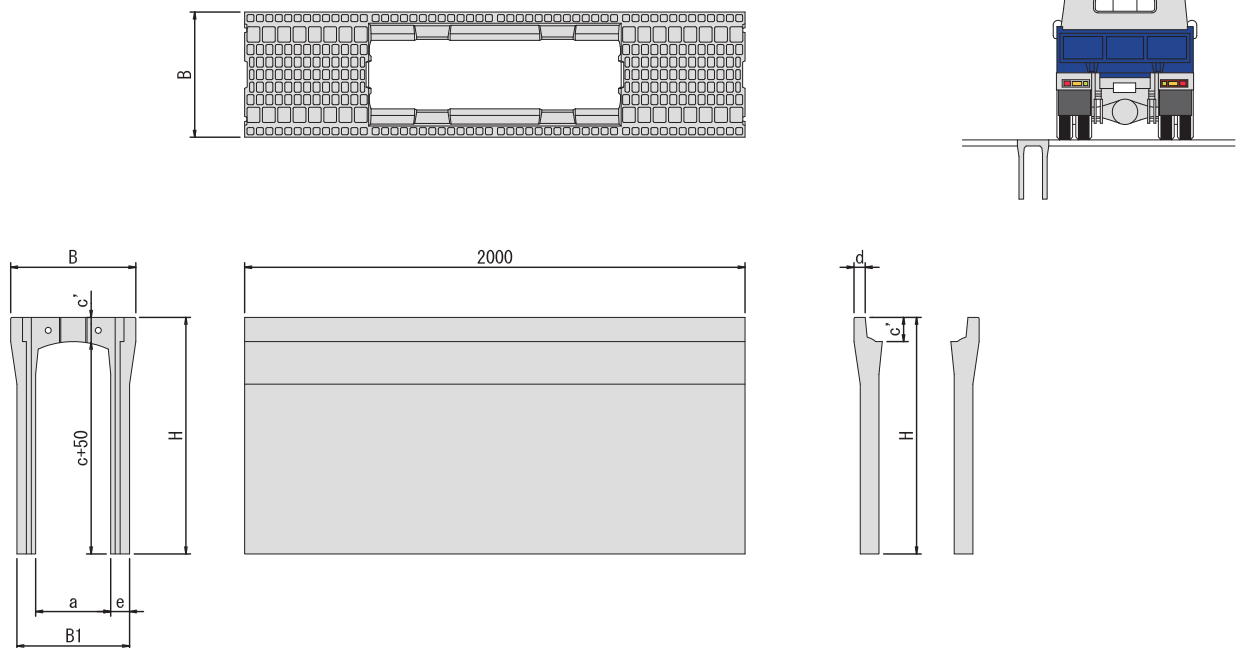

	呼び名		寸 法 (mm)					参考質量 (kg)		
	内幅 (a)	× 内高 (c)	B	H	c'	d	e		B1	
※※※※※	500	×	400		575			60	620	551
		×	500		675					607
		×	600		775					719
		×	700		875			70	640	785
		×	800		975					850
		×	900		1,075					1,039
		×	1,000		1,175			85	670	1,119
		×	1,100		1,275					1,198
		×	1,200	720	1,375	127	55			1,388
		×	1,300							
	×	1,400		1,575			95	690	1,566	
	×	1,500		1,675					1,860	
	×	1,600		1,775					1,963	
	×	1,700		1,875					2,066	
	×	1,800		1,975			110	720	2,170	
	×	1,900		2,075					2,273	
	×	2,000		2,175					2,376	
	600	×	400		590					647
		×	500		690			65	730	708
		×	600		790					769
×		700		890					894	
×		800		990			75	750	965	
×		900		1,090					1,035	
×		1,000		1,190					1,241	
×		1,100		1,290			90	780	1,326	
×		1,200	830	1,390	142	60			1,410	
×		1,300								1,613
※※※※※	×	1,400		1,590			100	800	1,707	
	×	1,500		1,690					1,801	
	×	1,600		1,790					2,113	
	×	1,700		1,890					2,221	
	×	1,800		1,990			115	830	2,329	
	×	1,900		2,090					2,437	
	×	2,000		2,190					2,545	

cは呼び高さであり、製品実長はc-2mmとする。

※の規格については営業担当者までお問い合わせください。